


[Copy](#) [web](#) [this site](#)

[Rebuild Services](#) | [FAQ](#) | [ABS Wizard](#) | [Testimonials](#) | [Warranty](#) | [Contact Us](#)

1 **2** **3** **4** **5**

Step 2: Remove your module.

Vehicle: 2000 Chevy S10
ABS Module: Kelsey Hayes 325, 310, or Series 30

Removal Procedure

On the S10 Pickup and Blazer, the ABS module is mounted under the hood near the brake fluid reservoir as shown in the diagram on the right. Some models may use the larger Kelsey Hayes 310 module.



Chevy S10


1) Make sure the ignition is off when you disconnect the module or it could be permanently damaged.

2) Remove the connector(s) from the module.

3) Remove the screws that hold the module to the hydraulic control unit.

4) Cover the exposed surface of the hydraulic unit with aluminum foil.

5) You can still drive your vehicle since the brakes will not be impaired by removal of the ABS module. On certain vehicles, the speedometer receives an input signal from the ABS module and may not function until the module is back in place.

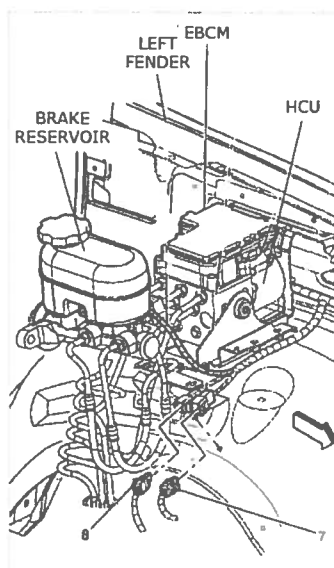

Under the hood location of the Kelsey Hayes 325 module.

[Home](#) | [ABS Modules](#) | [Instrument Clusters](#) | [Switch Clusters](#) | [Pump Motors](#)
[Climate Controls](#) | [Overhead Computers](#) | [FAQ](#) | [ABS Wizard](#) | [Testimonials](#)
[Warranty](#) | [About Us](#) | [Contact Us](#) | [Sitemap](#)

© Copyright 2005-2008, Circuit Solutions Inc.
 All rights reserved

ModuleMaster
 2006 South Main
 Moscow, ID 83843-8913

Local: 208-892-0764
Toll free: 888-892-0764

Hours: 8am-5pm M-F (PST)

